

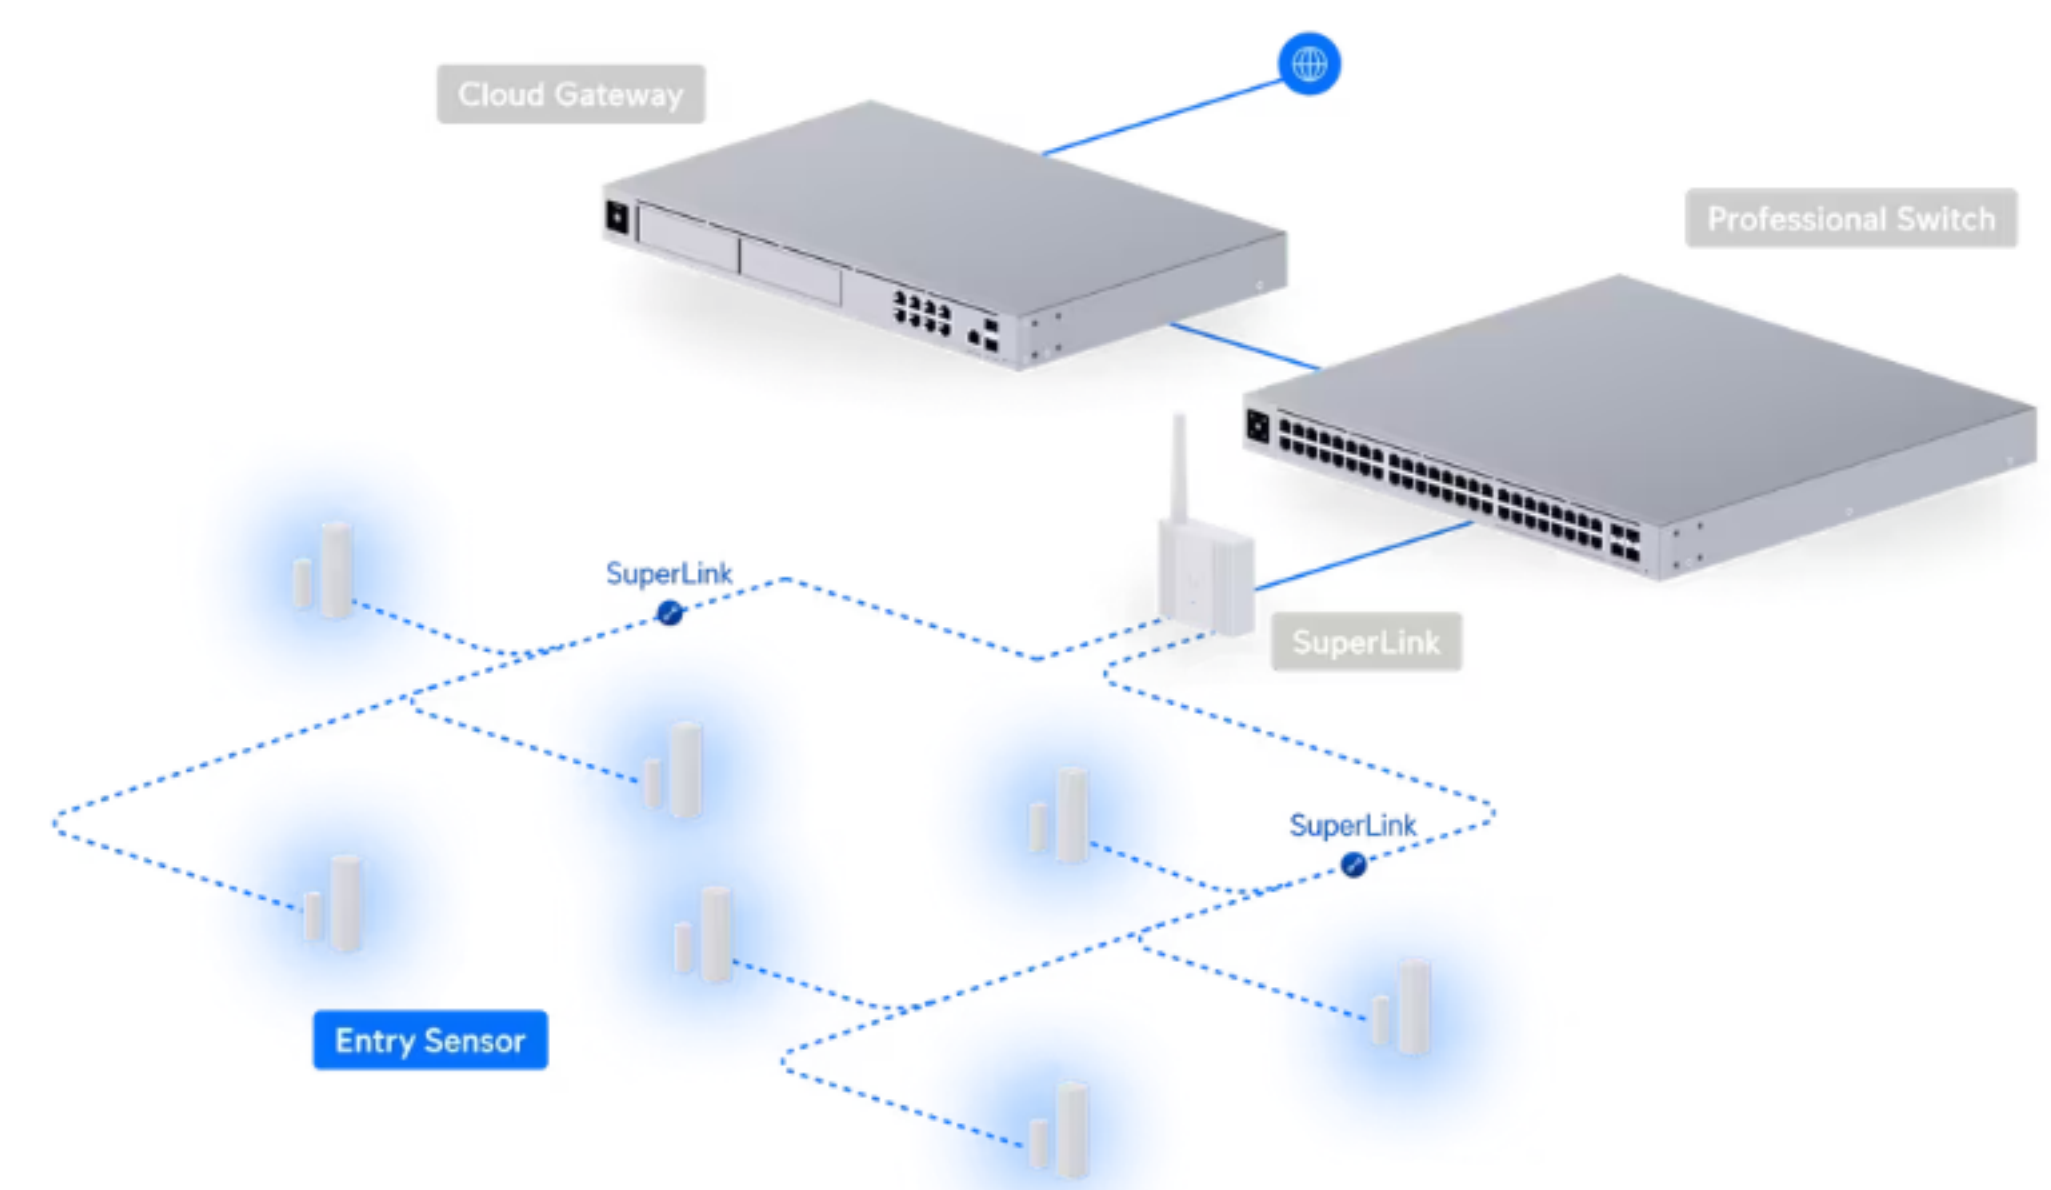


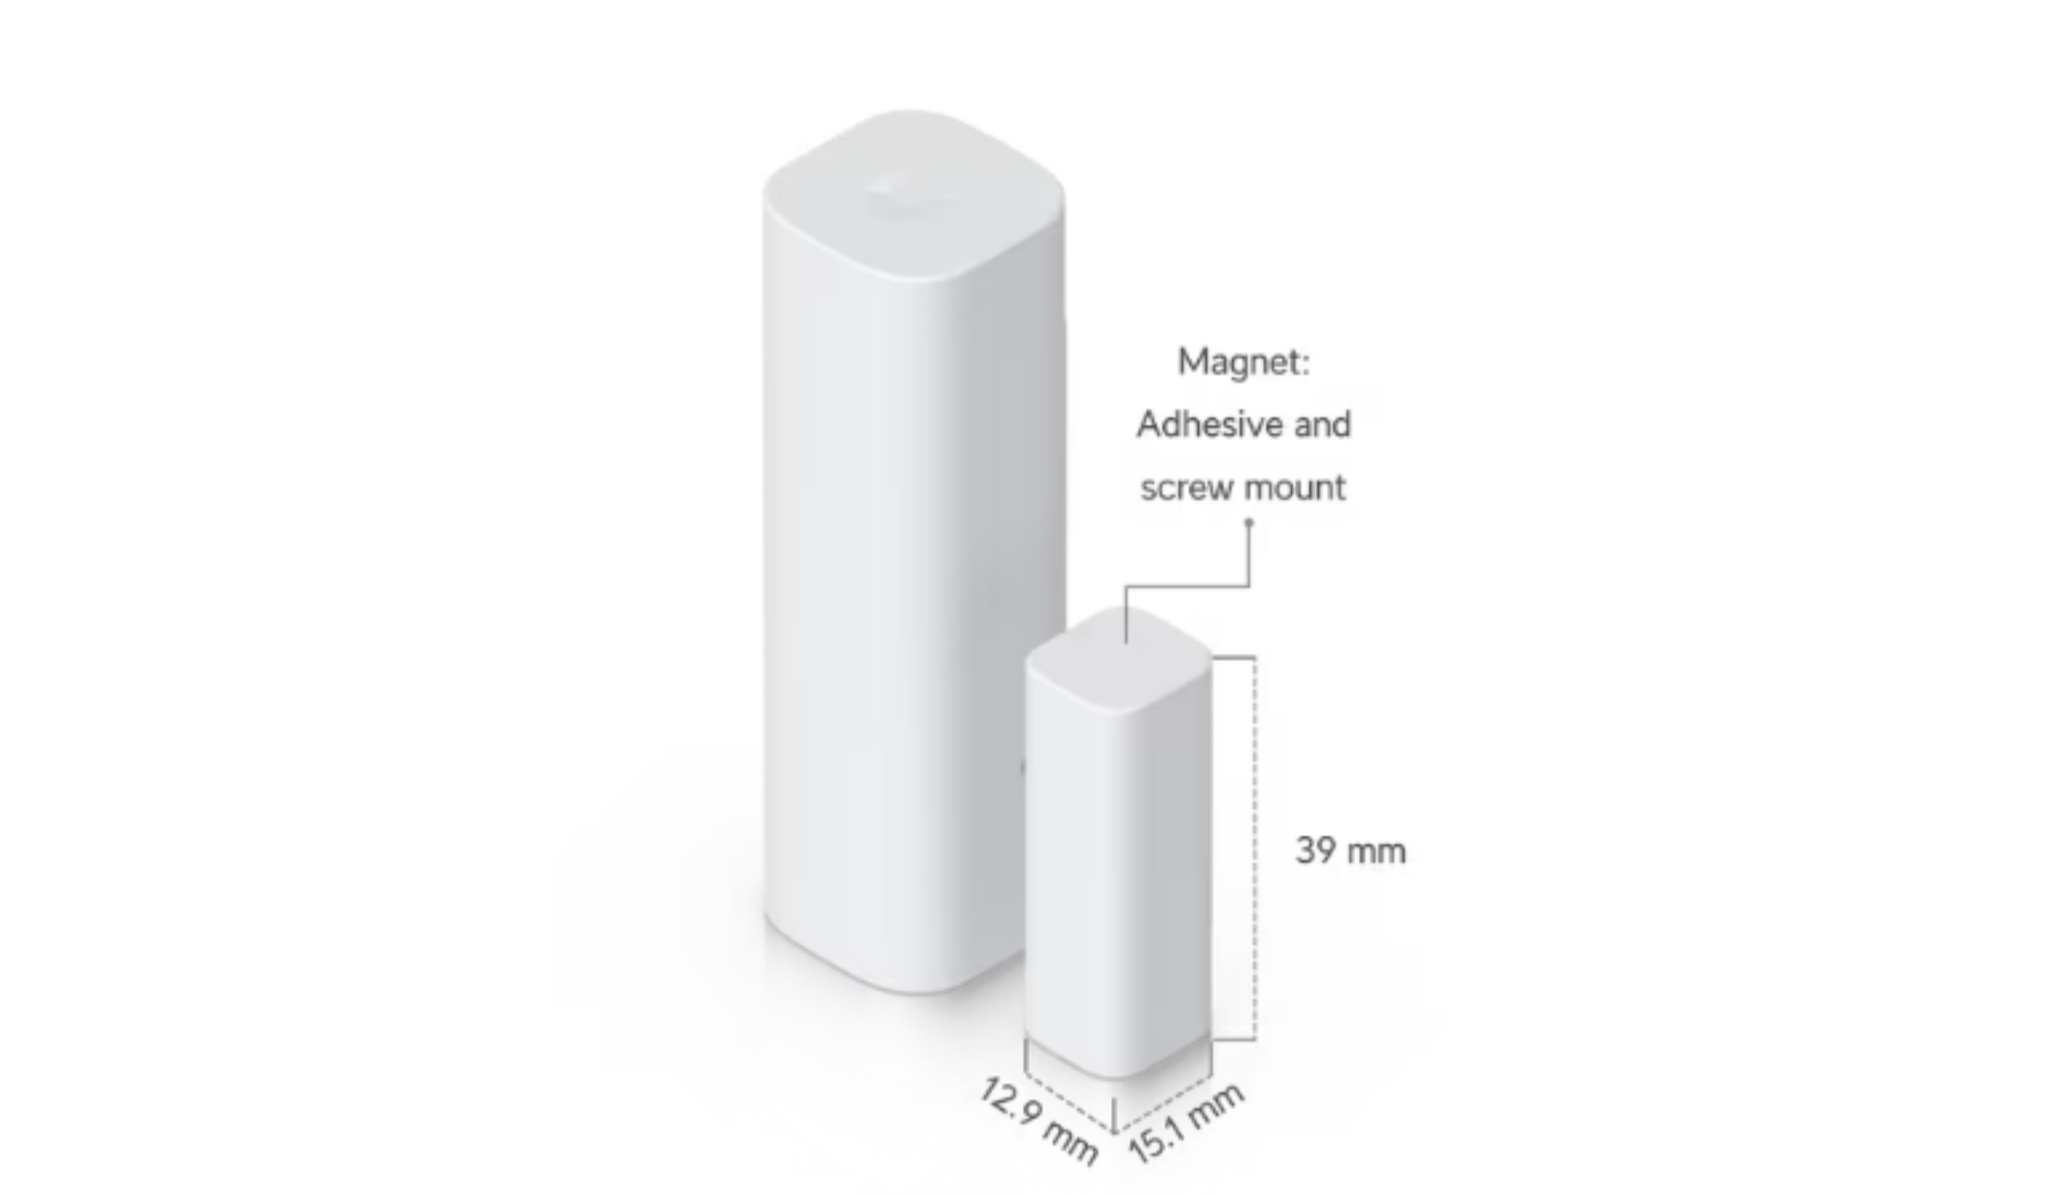

Entry Sensor

USL-Entry

- Datasheet**
- In The Box
- Marketing Images
- Installation Guide

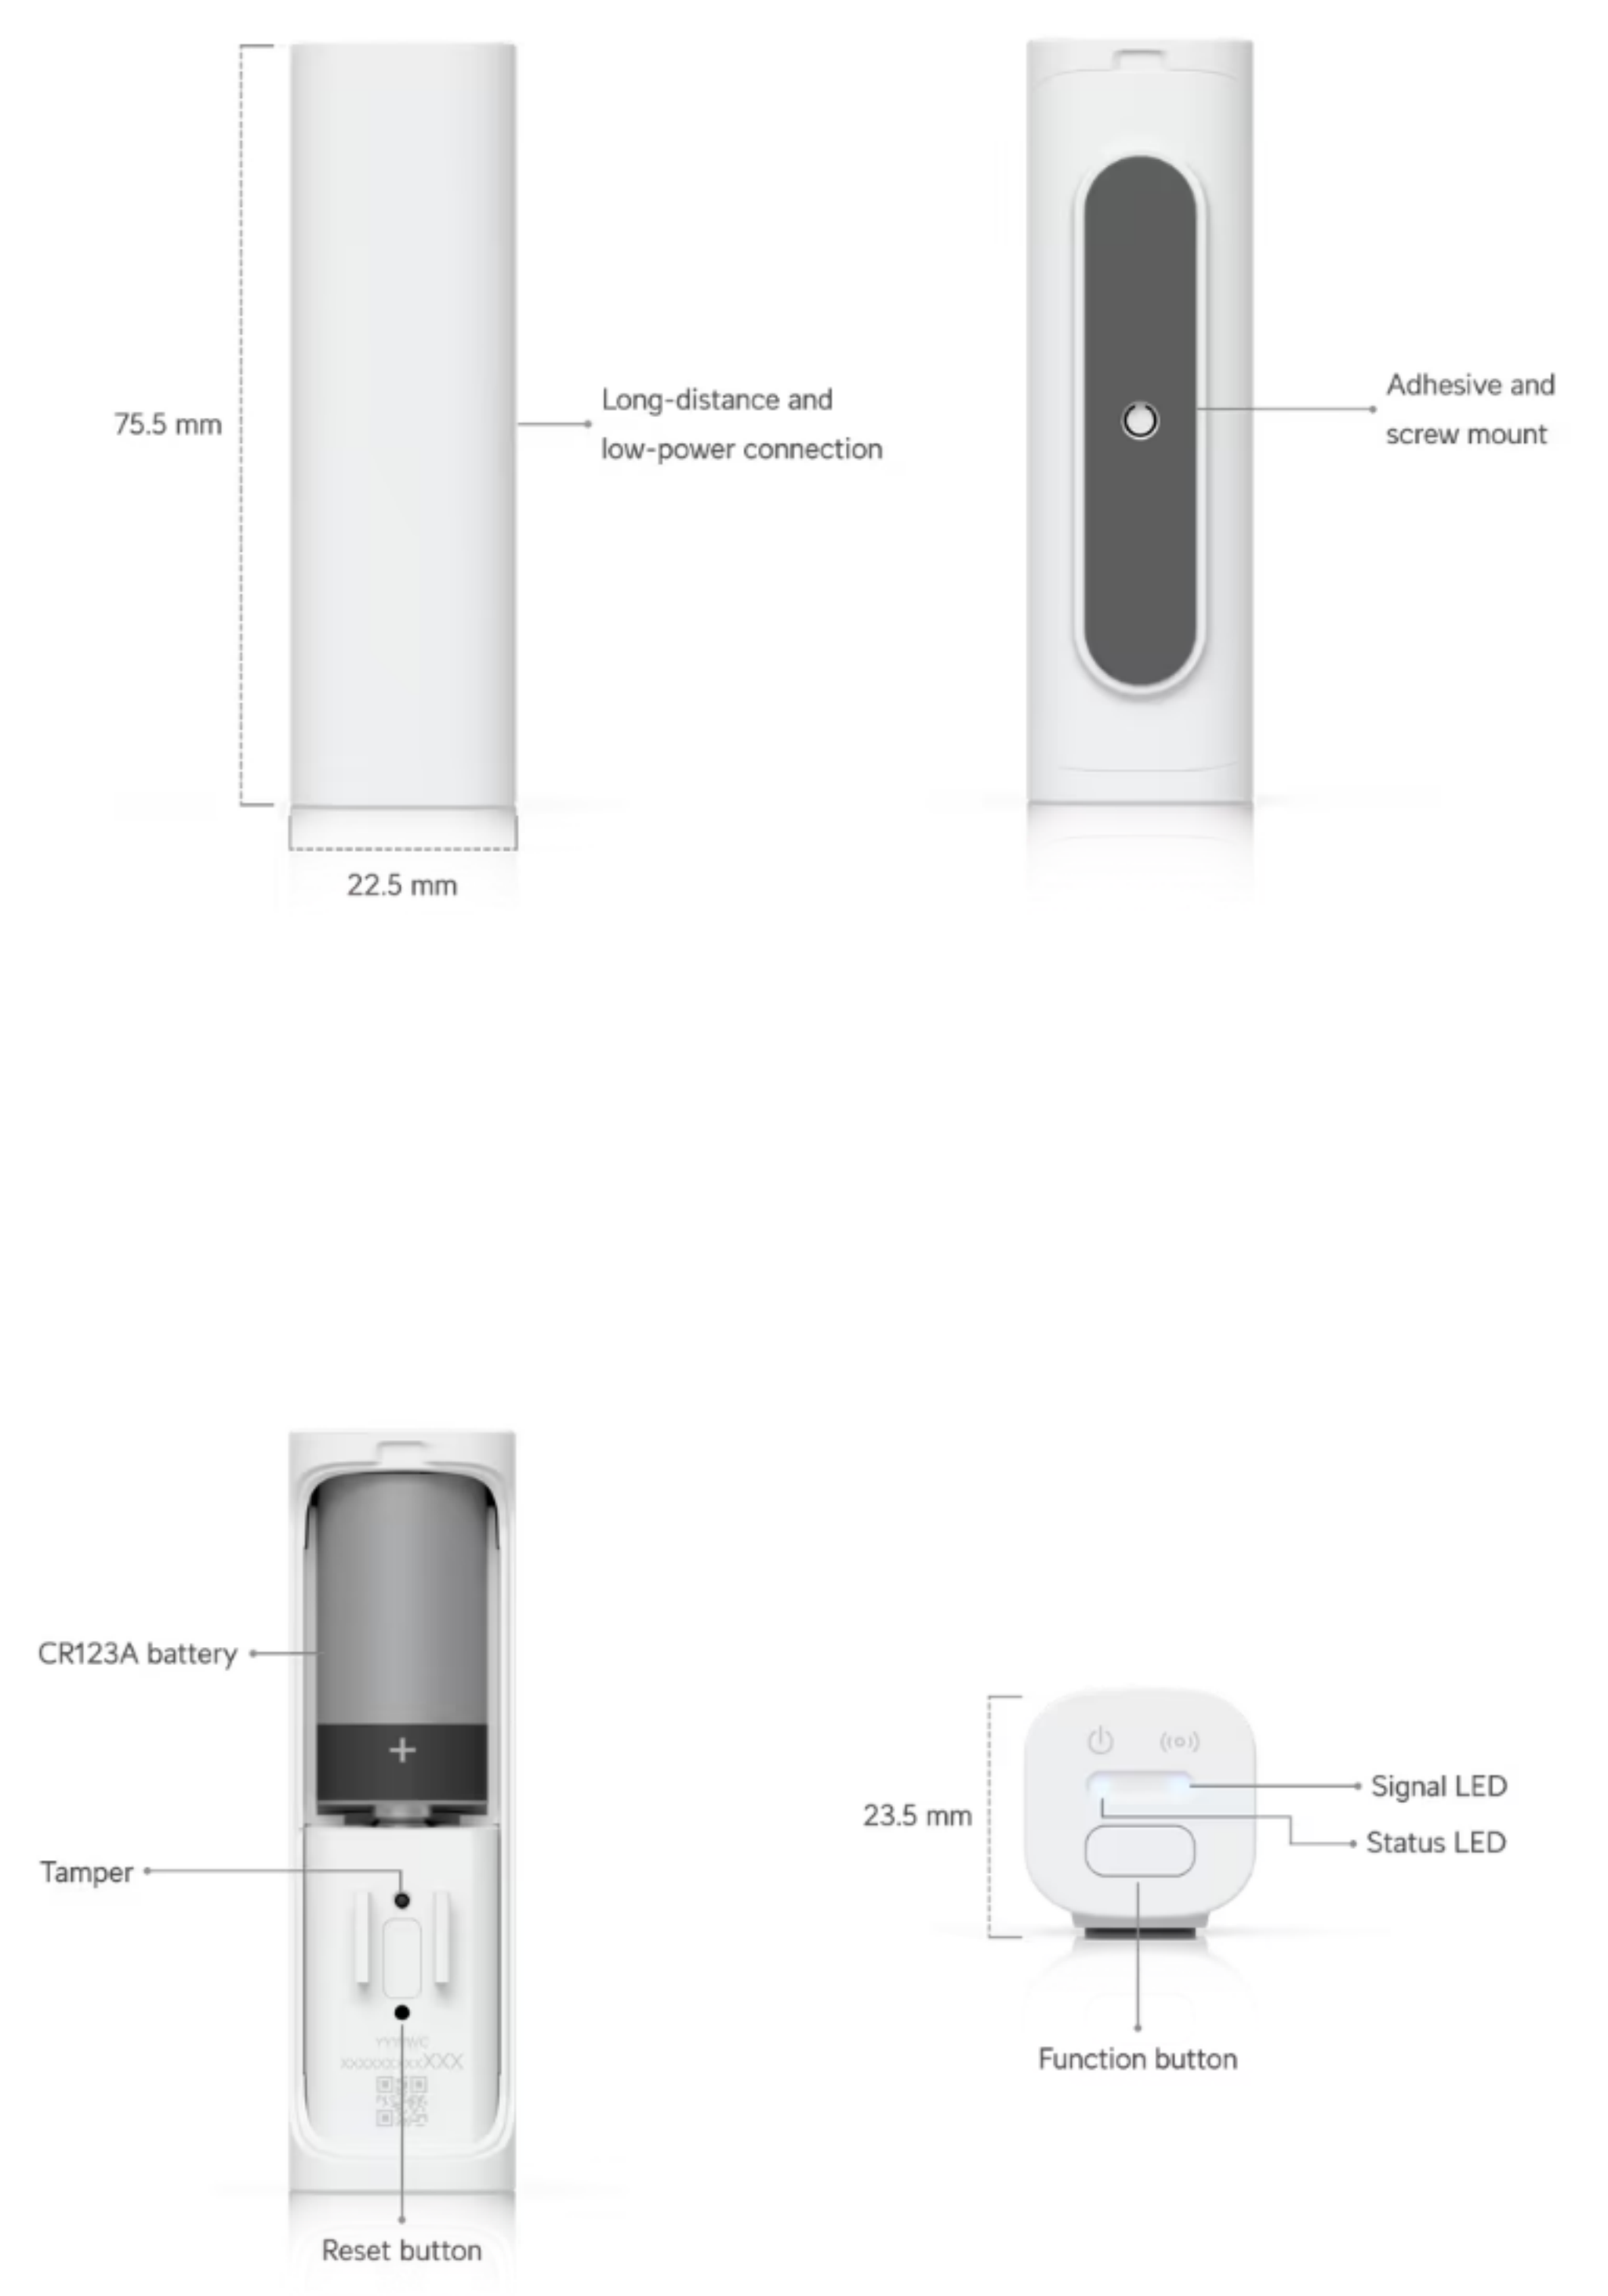

^ Overview

Dimensions	Device: 75.5 x 23.5x 22.5 mm (3 x 0.93 x 0.89") Magnet: 39 x 15.1 x 12.9 mm (1.5 x 0.6 x 0.5")
Mounting	Adhesive and screw mount
UniFi Application Suite	Protect

^ Performance

Connectivity	SuperLink (Proprietary)
Operating Frequency	<ul style="list-style-type: none"> US: 915.6-927.6 MHz EU: 865.1-869.5 MHz
Antenna Gain	<ul style="list-style-type: none"> SuperLink: 0 dBi
Max. TX Power	<ul style="list-style-type: none"> SuperLink: 14 dBm
Max. Range	<ul style="list-style-type: none"> SuperLink: 2 km (1.2 mi)
Sensor Features	<ul style="list-style-type: none"> Reed Switch: ✓

^ Hardware

Max. Power Consumption	27.7mW
Supported Voltage Range	3V
Power Method	Lithium battery CR123A
Battery Life	Up to 6 years
Weight	Device: 41 g (1.4 oz) Magnet: 22 g (0.8 oz)
Enclosure Material	Polycarbonate
Mount Material	Polycarbonate
Buttons	(1) Factory-reset (1) Function button (1) Tamper switch
LEDs	(1) Status: R/B/W (1) Signal: B/R
Ambient Operating Temperature	0 to 40° C (32 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
Certifications	FCC, IC, CE
NDAA Compliant	✓

^ Software

Application Requirements	<ul style="list-style-type: none"> Web Application: UniFi Protect Mobile App: UniFi Protect iOS™ and Android™
--------------------------	---