


REVISIONS				
REV.	DESCRIPTION	ECN	DATE	APPROVED
C	REFER TO ECN	11424	2/28/13	CAP

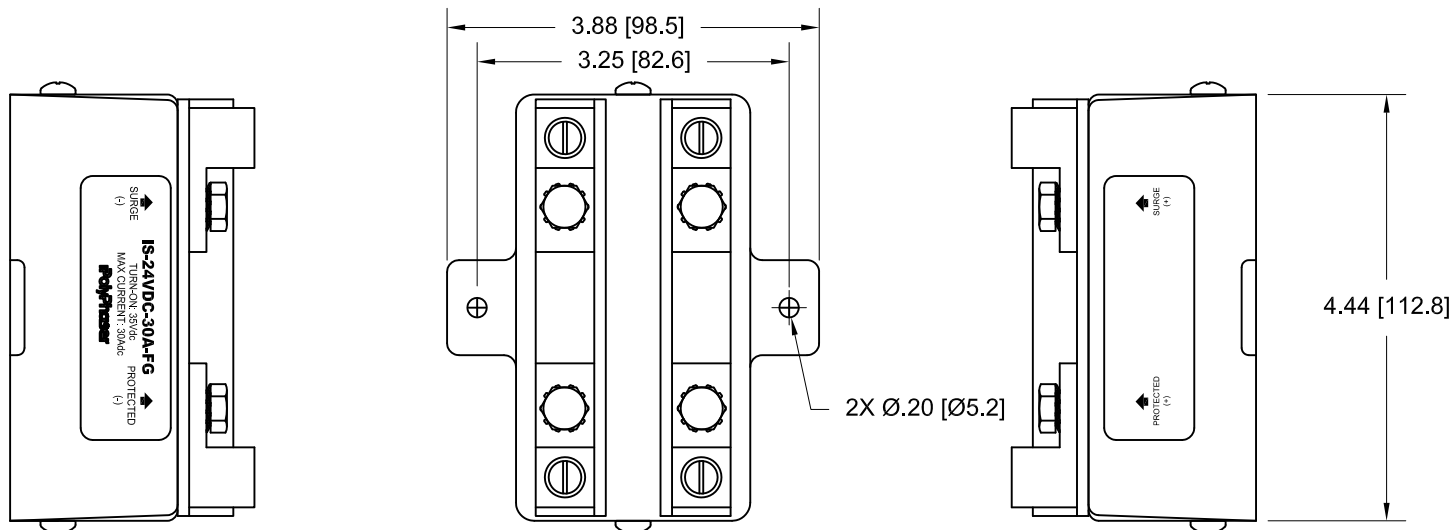

MAXIMUM CHARACTERISTICS

SURGE:
 18kA IEC 1000-4-5 8/20 μ s WAVEFORM
TURN-ON:
 35Vdc
TURN-ON TIME:
 <2ns
RESISTANCE:
 0.02 Ω
CONNECTIONS:
 14 TO 1/0AWG COMPRESSION LUG @30A
TEMPERATURE:
 -40° TO +65°C

CUSTOMER APPROVAL _____ DATE: _____

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS TOLERANCES: FRACTIONS=± .03 ANGLES= ° XXX=± .010 MATERIAL: NOTED THIRD-ANGLE PROJECTION 	DRAWN KM	DATE 1/5/96		
	ENG APPD TK	1/31/96		
	PRODUCT MGR		TITLE PWR DC BATTERY T.O.35Vdc 30A FLOATING GROUND	
	MARKETING APPD			
PROJECT NO.			CUSTOMER SPECIFICATION	
SIZE A		CAGE 61114	PART NUMBER IS-24VDC-30A-FG	REV C
SCALE= 1:2		PROD CAT DCP	DOCUMENT NAME 1400-165	SHEET 1 of 1

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.