

StarterDish™ 24 UM


DIRECTIONAL PARABOLIC DISH ANTENNA

StarterDish™ antennas are designed for CPE applications. Antenna is light weight with their reflector made of aluminium. StarterDish™ antennas provide excellent beam performance in cost effective package. Antennas are easy to assemble and come in highly economical 5 packs.


Warning: harsh environment (coastal areas, chimney gases, chemical factories, volcanos) may cause premature oxidation of the StarterDish™ antenna body. For deployments in harsh environment we recommend using UltraDish™ antennas.



Gain H

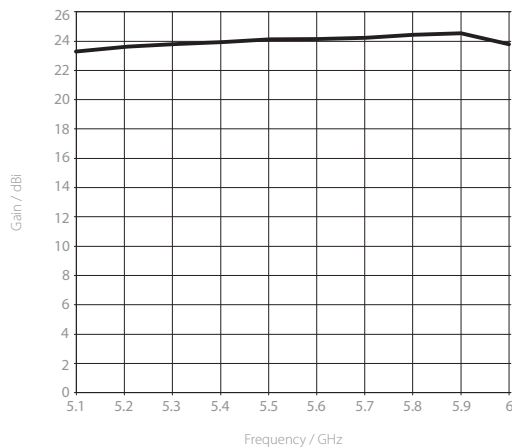


Azimuth Pattern H

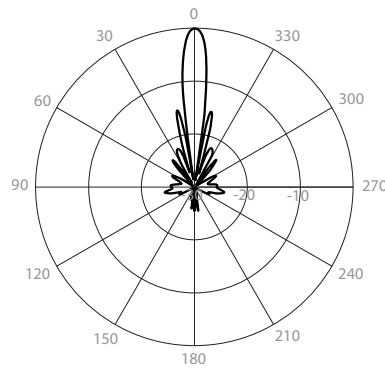


H - Port Pattern Azimuth 5.6 GHz

Elevation Pattern H

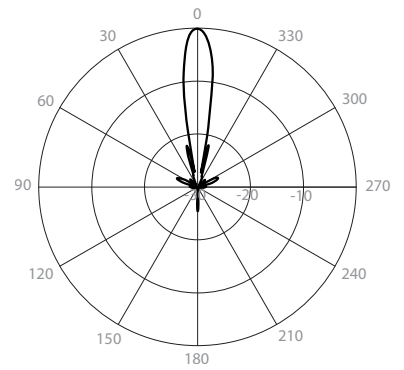


H - Port Pattern Elevation 5.6 GHz

Gain V

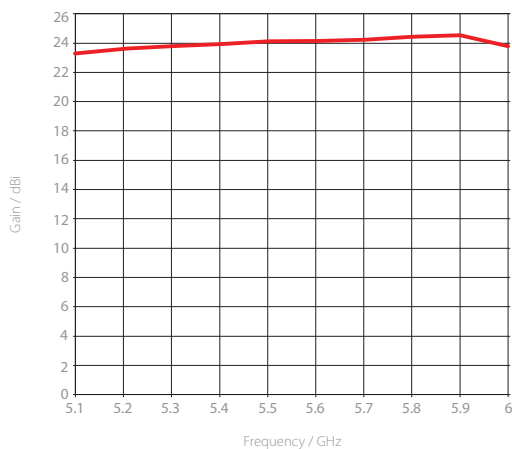


Azimuth Pattern V

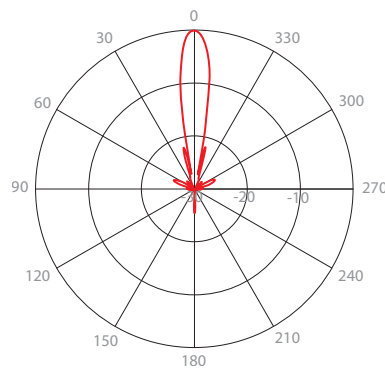

V - Port Pattern Azimuth 5.6 GHz

Elevation Pattern V

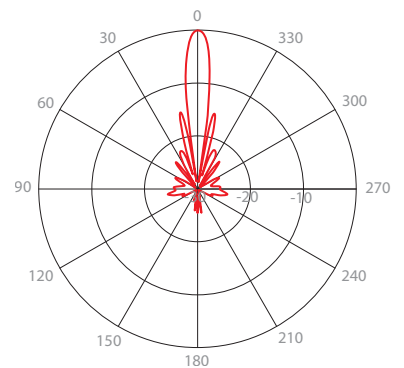

V - Port Pattern Elevation 5.6 GHz


PHYSICAL

Antenna Connection	Waveguide Port
Antenna Type	Parabolic Dish
Materials	UV Resistant ABS Plastic, Aluminium, Steel, Zinc Plated Steel & Stainless Steel Hardware
Enviromental	IP65
Pole Mounting Diameter	20-55 mm (0.8-2.1 inch) Recommended as close to 55 mm (2.1 inch) as possible
Temperature	-35°C to +55°C (-31°F to +131°F)
Wind Survival	160 km/h (100 mi/h)
Wind Load	150/22 N - Front/Side at 160 km/h (100 mi/h)
Effective Projected Area	1234/182 cm² - Front/Side (191.3/28.2 in²)
Mechanical Adjustment	± 15° Elevation
Weight	1.5 kg (3.3 lbs) – single unit* 10.5 kg (23.1 lbs) – 5PACK (5 units) incl. package*
Dimensions	Retail Box 5PACK: 695 x 447 x 110 mm (27.3 x 17.5 x 4.3 inch)

COMPATIBLE WIRELESS PLATFORMS

RF elements®	StarterAdapter™ SMA
Mimosa® by Airspan	C5x
Ubiquiti Networks®	PrismStation™ 5AC, IsoStation™ 5AC, IsoStation™ M5

PRODUCT DIMENSIONS

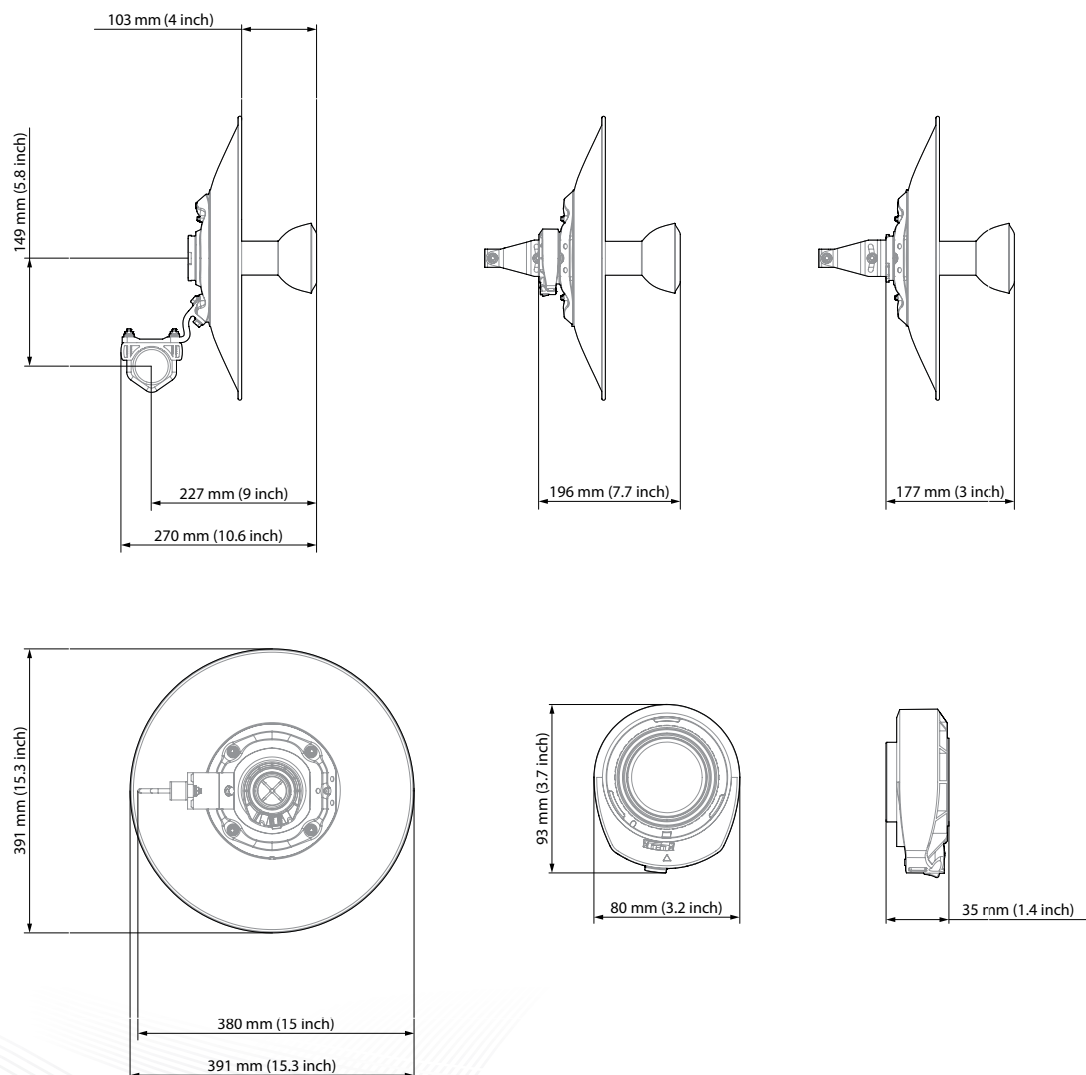

*Main beam defined up to first null

2/2 StarterDish™ 24 UM Rev 12-2021

RF elements® and StarterDish™ are trademarks of RF elements s.r.o., Slovakia.
All rights of respective trademark owners reserved.
© RF elements 2021