

Entrance & Exit Management

DATASHEET



INTRODUCTION

Milesight Entrance & Exit Management Camera combines video surveillance with AI, ANPR and other cutting-edge technologies to help traffic management systems intelligently monitor and manage traffic behavior at entrances and exits. Based on real-time data, valuable insights are obtained to optimize the traffic flow at the entrance and exit, reduce the risk of accidents, and deal with emergencies more efficiently. It can be widely used in the security gate system, which can significantly improve management efficiency and make traffic more intelligent, safe and smooth.



Entrance & Exit AI LPR Pro Dome Camera

- Advanced Motorized Lens
- Smart IR II Technology
- 140dB Super WDR
- Up to 25m Illumination Distance
- IP67 & IK10
- Versatile Interfaces
- Clamshell Design
- Integrated Cable Management



Entrance & Exit AI LPR Bullet Camera

- Advanced Motorized Lens
- Smart IR II Technology
- 140dB Super WDR
- Up to 25m Illumination Distance
- IP67 & IK10
- Versatile Interfaces
- Unique Structure Design
- Integrated Junction Box



Entrance & Exit Supplement Light AI LPR Pro Bullet Plus Camera

- Integrated Supplement Light
- Wiegand Protocol Supported
- Advanced Motorized Lens
- Smart IR II Technology
- Up to 25m Illumination Distance
- 140dB Super WDR
- IP67
- Versatile Interfaces
- Integrated Cable Management Bracket

Entrance & Exit Management



Excellent Capture Performance

- Superior Image Quality for 24/7 Traffic Monitoring



- Accurately Capture Plates of Fast Moving Vehicles



- Excellent Capture Performance at High Speed and Accuracy

>98%

200km/h
Recognizable Speed

4 Detection Regions

License Plate Serial Format

AI-empowered LPR

- Embedded AI LPR Algorithm



- AI-based Vehicle Attributes Recognition



- Broad Range of Countries and Regions Supported

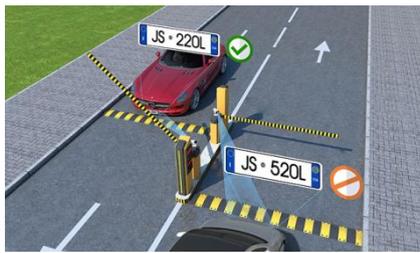


Plate Management & Search

- LPR Smart Search Function



- Black/White List Management




- Plate Data Management



Evidence Camera Linkage Improves Enforcement Efficiency

- Linking LPR Camera and Regular Camera for Evidence Capture
- LPR Camera for License Plate Recognition and Linkage Triggering
- Regular Camera for Full Snapshot of the Scene

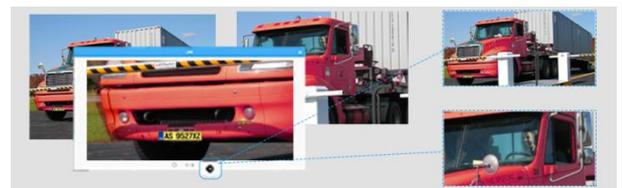


Extensive Compatibility


- Versatile Interface
 - Wiegand Interface Supported
 - A Whole Array of Interfaces including Alarm I/O, Audio I/O, DC 12V and PoE Port.



- Stand-alone LPR Solution & Closed-loop Back-end Integration

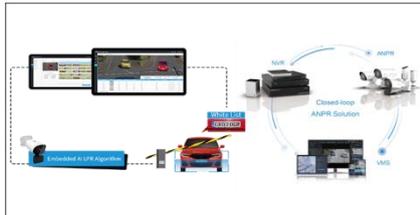

- Open Integration with 3rd Party
 - 3rd Integration with CGI/APIs
 - Push All Data to the 3rd Integration Systems

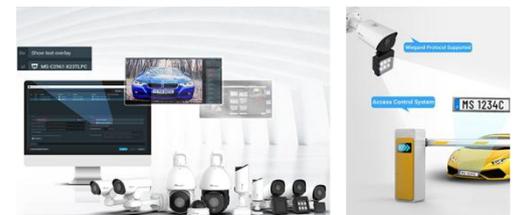

OBTAIN THE USER MANUAL



	Name	Entrance & Exit AI LPR Bullet Camera	Entrance & Exit AI LPR Pro Dome Camera
Camera	Appearance		
	Model	MS-C2964-RFLPE (2MP)	MS-C2972-RFLPE (2MP)
	Image Sensor	1/2.8" Progressive Scan CMOS	
	Min. Illumination	Color: 0.005Lux@F1.4 B/W: 0Lux with IR on	
	WDR	140dB Super WDR	
	Shutter Time	1/100000s~1s	
	Day/Night Mode	Day/Night/Auto/Customize/Schedule	
	S/N	>55dB	
Lens	Lens	Motorized 2.7~13.5mm@F1.4	
	Field of View	H111°~H34°/D130°~D39°/V60°~V19°	H115°~H34°/D135°~D39°/V62°~V19°
	Mount	Φ14	
	Focus Control	Auto/Manual	
Entrance & Exit Management	Max. Vehicle Speed	200km/h	
	Recognition Accuracy	>98%	
	Coverage	Support simultaneous detection of 4 regions	
	Country/Region Supported	More than 80 countries and regions	
	Illumination Distance	Up to 25m during the day; Up to 20m during the night with illumination	
	Attributes Identification	Plate Color, Vehicle Type, Vehicle Color, Vehicle Brand, No-plate Vehicle Capture, Vehicle Direction Detection	
	Smart Traffic Function	Evidence Camera Linkage	
	White/Black List	Up to 1000 records inside the camera	
LPR Smart Search	Support		
Interface	Ethernet	1*RJ45 10M/100M Ethernet Port	
	Audio I/O	1/1 (Multi-interface Version)	Built-in Microphone and 1 Audio Output interface
	Alarm I/O	1/1 (Multi-interface Version)	1/1
Video	Max. Image Resolution	1920x1080	
	Primary Stream	60Hz: 60fps@(1920x1080, 1280x960, 1280x720, 704x576) 50Hz: 50fps@(1920x1080, 1280x960, 1280x720, 704x576)	
	Secondary Stream	60Hz: 60fps@(704x576, 640x480, 640x360, 352x288, 320x240) 50Hz: 50fps@(704x576, 640x480, 640x360, 352x288, 320x240)	
	Tertiary Stream	60Hz: 30fps@(1920x1080, 1280x720, 704x576, 640x480, 640x360, 320x240) 50Hz: 25fps@(1920x1080, 1280x720, 704x576, 640x480, 640x360, 320x240)	
	Video Compression	H.265*/H.265(HEVC)/H.264*/H.264/MJPEG	



Video	Video Bit Rate	16Kbps~16Mbps(CBR/VBR Adjustable)
	Privacy Masking	Up to 8 Areas (Mask Area and Mosaic Area are optional)
	ROI	Up to 8 areas
	Image Setting	Brightness/Contrast/Saturation/Sharpness
Network	Network Storage	NAS(Support NFS, SMB/CIFS), ANR
	Protocol	IPv4/IPv6, ARP, TCP, UDP, RTCP, RTP, RTSP, RTMP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, Bonjour, SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL
Audio	Audio Compression	G.711/AAC/G.722/G.726
	Audio Sampling Rate	8/16/32/44.1/48KHz
	Audio Bit Rate	16~256kbps
	Two-way Audio	Support
System	System Compatibility	API, HTTP, TCP, ONVIF Profile G & Q & S & T
	Storage	microSD/SDHC/SDXC Card Local Storage, up to 256G
	Advanced Function	BLC, HLC, 2D DNR, 3D DNR, Defog, AWB, IP Address Filtering, AGC, Anti-flicker, Corridor Mode, Deblur, Watermark
	SIP/VoIP Support	Yes, Voice & Video-over-IP
	Event Trigger	Black/White List, Motion Detection, Network Disconnection, External Input, Audio Alarm, etc.
	Event Action	FTP Upload, SMTP Upload, SD Card Record, External Output, SIP Phone, HTTP Notification, etc.
General	Working Temperature	-40°C~60°C
	Working Humidity	0~95%(Non-condensing)
	Power Supply	PoE (802.3af) / DC 12V±10%
	Power Consumption	6W MAX 10W MAX (With IR on) 6W MAX 8W MAX (With IR on)
	Weather Proof	Up to IP67-rated for Weather-resistant Performance
	Housing	Vandal-proof IK10-rated Metal Housing
	Weight	825g 1100g
	Dimensions	Φ76mmX239.5mm Φ143mmX108.4mm
	Warranty	3/5 Years



	Name	Entrance & Exit Supplement Light AI LPR Pro Bullet Plus Camera	
Camera	Appearance		
	Model	MS-C2966-RFLWPE /W (2MP)	MS-C2966-RFLWPE /R (2MP)
	Image Sensor	1/2.8" Progressive Scan CMOS	
	Min. Illumination	Color: 0.005Lux@F1.4 B/W: 0Lux with IR on	
	WDR	140dB Super WDR	
	Shutter Time	1/100000s~1s	
	Day/Night Mode	Day/Night/Auto/Customize/Schedule	
	S/N	>55dB	
	Lens	Lens	Motorized 2.7~13.5mm@F1.4
Field of View		H113°~H33°/D130°~D38°/V60°~V18°	
Mount		Φ14	
Focus Control		Auto/Manual	
Entrance & Exit Management	Max. Vehicle Speed	200km/h	
	Recognition Accuracy	>98%	
	Coverage	Support simultaneous detection of 4 regions	
	Country/Region Supported	More than 80 countries and regions	
	Illumination Distance	Up to 25m during the day; Up to 25m during the night with illumination	
	Attributes Identification	Plate Color, Vehicle Type, Vehicle Color, Vehicle Brand, No-plate Vehicle Capture, Vehicle Direction Detection	
	Smart Traffic Function	Evidence Camera Linkage	
	White/Black List	Up to 1000 records inside the camera	
	LPR Smart Search	Support	
Illuminator	Supplement Light	White LED Light	IR LED Light
	Light Bead	6 (For White LED Light)	9 (For IR LED Light)
	Light Control	Auto/Always On/Off/Customize	
Interface	Ethernet	1*RJ45 10M/100M Ethernet Port	
	Audio I/O	1/1	
	Alarm I/O	1/1	
	Wiegand	Standard Wiegand 26-bit	
	RS485	Support	




Video	Max. Image Resolution	1920x1080	
	Primary Stream	60Hz: 60fps@(1920x1080, 1280x960, 1280x720, 704x576) 50Hz: 50fps@(1920x1080, 1280x960, 1280x720, 704x576)	
	Secondary Stream	60Hz: 60fps@(704x576, 640x480, 640x360, 352x288, 320x240) 50Hz: 50fps@(704x576, 640x480, 640x360, 352x288, 320x240)	
	Tertiary Stream	60Hz: 30fps@(1920x1080, 1280x720, 704x576, 640x480, 640x360, 320x240) 50Hz: 25fps@(1920x1080, 1280x720, 704x576, 640x480, 640x360, 320x240)	
	Video Compression	H.265*/H.265(HEVC)/H.264*/H.264/MJPEG	
	Video Bit Rate	16Kbps~16Mbps(CBR/VBR Adjustable)	
	Privacy Masking	Up to 8 Areas (Mask Area and Mosaic Area are optional)	
	ROI	Up to 8 areas	
	Image Setting	Brightness/Contrast/Saturation/Sharpness	
Network	Network Storage	NAS(Support NFS, SMB/CIFS), ANR	
	Protocol	IPv4/IPv6, ARP, TCP, UDP, RTCP, RTP, RTSP, RTMP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, Bonjour, SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL	
Audio	Audio Compression	G.711/AAC/G.722/G.726	
	Audio Sampling Rate	8/16/32/44.1/48KHz	
	Audio Bit Rate	16~256kbps	
	Two-way Audio	Support	
System	System Compatibility	API, HTTP, TCP, Wiegand Protocol, ONVIF Profile G & Q & S & T	
	Storage	microSD/SDHC/SDXC Card Local Storage, up to 256G	
	Advanced Function	BLC, HLC, 2D DNR, 3D DNR, Defog, AWB, IP Address Filtering, AGC, Anti-flicker, Corridor Mode, Deblur, Watermark	
	SIP/VoIP Support	Yes, Voice & Video-over-IP	
	Event Trigger	Black/White List, Motion Detection, Network Disconnection, External Input, Audio Alarm, etc.	
	Event Action	FTP Upload, SMTP Upload, SD Card Record, External Output, SIP Phone, HTTP Notification, etc.	
General	Working Temperature	-40°C~60°C	
	Working Humidity	0~95%(Non-condensing)	
	Power Supply	PoE (802.3at) / DC 12V±10%	
	Power Consumption	6W MAX 24W MAX (For White LED Light)	6W MAX 24W MAX (For IR LED Light)
	Weather Proof	Up to IP67-rated for Weather-resistant Performance	
	Surge Protection	4KV	
	Weight	1630g 2075g (With Supplement Light)	
	Dimensions	320mmX134mmX126mm 320mmX134mmX231mm (With Supplement Light)	
	Warranty	3/5 Years	

Entrance & Exit Management




Structure Diagrams


Entrance & Exit AI LPR Bullet Camera

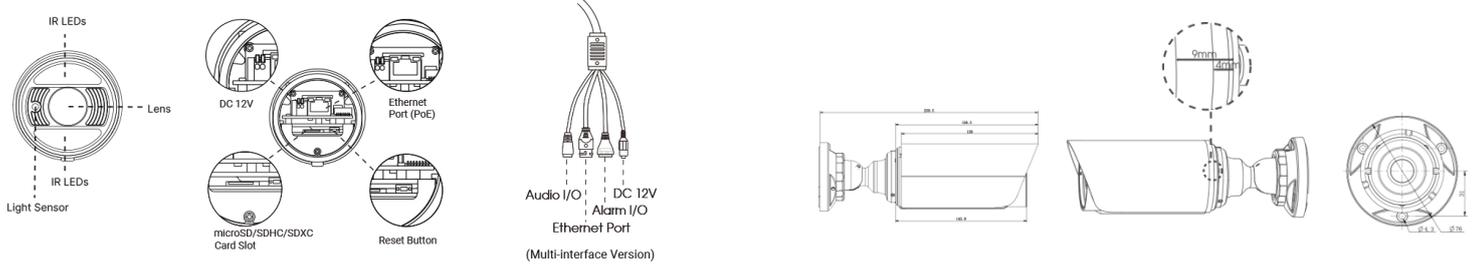

Entrance & Exit AI LPR Pro Dome Camera

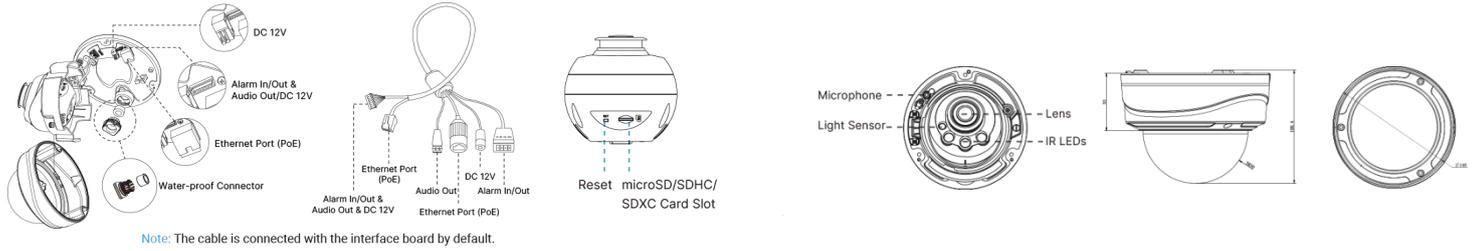

Entrance & Exit Supplement Light AI LPR Pro Bullet Plus Camera

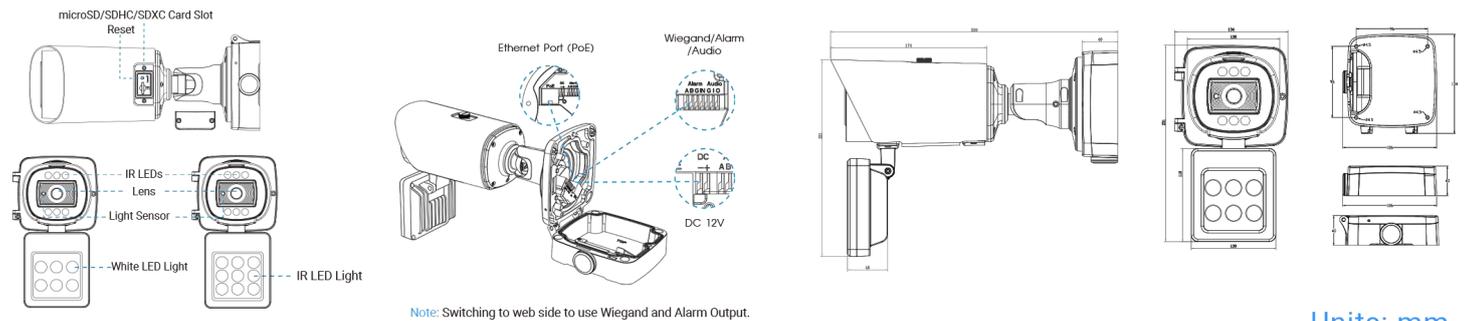

Units: mm

Accessories Support

Entrance & Exit AI LPR Bullet Camera

	A01 Pole Mount Weight: 720g Dimensions: 170*51.5*152.6mm		A03 External Corner Bracket Weight: 900g Dimensions: 170*152.5*76.3mm		A63 Junction Box Weight: 620g Dimensions: 134*126*40mm
--	---	--	--	--	---

Entrance & Exit Supplement Light AI LPR Pro Bullet Plus Camera

	A62 Junction Box (Default) Weight: 510g Dimensions: 134*126*40mm		A01 Pole Mount Weight: 720g Dimensions: 170*51.5*152.6mm		A03 External Corner Bracket Weight: 900g Dimensions: 170*152.5*76.3mm
--	---	--	---	--	--

Entrance & Exit Supplement Light AI LPR Pro Bullet Plus Camera

	A01 Pole Mount Weight: 720g Dimensions: 170*51.5*152.6mm		A03 External Corner Bracket Weight: 900g Dimensions: 170*152.5*76.3mm		A72 Wall Mount Weight: 560g Dimensions: 240*160*136mm		AC-72 Smoked Dome Cover For concealing where a camera is pointed
	A75 Junction Box Weight: 200g Dimensions: 145*167*33.5mm		A76 Pendant Mount Weight: 620g Dimensions: 136*L (Lis default as 300mm, also can be extended with A76-L)		A76-L Extension Lever Weight: 315g Dimensions: 34*300mm		A78 Recessed Mount Weight: 715g Dimensions: 256*256*94mm

Milesight | www.milesight.com

Contact Us: sales@milesight.com support@milesight.com



Add: 220 NE 51st Street, Oakland Park, Florida 33334, USA
Tel: +1-800-561-0485

Add: 925, Anyang SK V1 Center, LS-ro 116beon-gil, Dongan-gu, Anvang-si, Korea
Tel: +82-31-990-7732

Add: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China
Tel: +86-592-5922772