


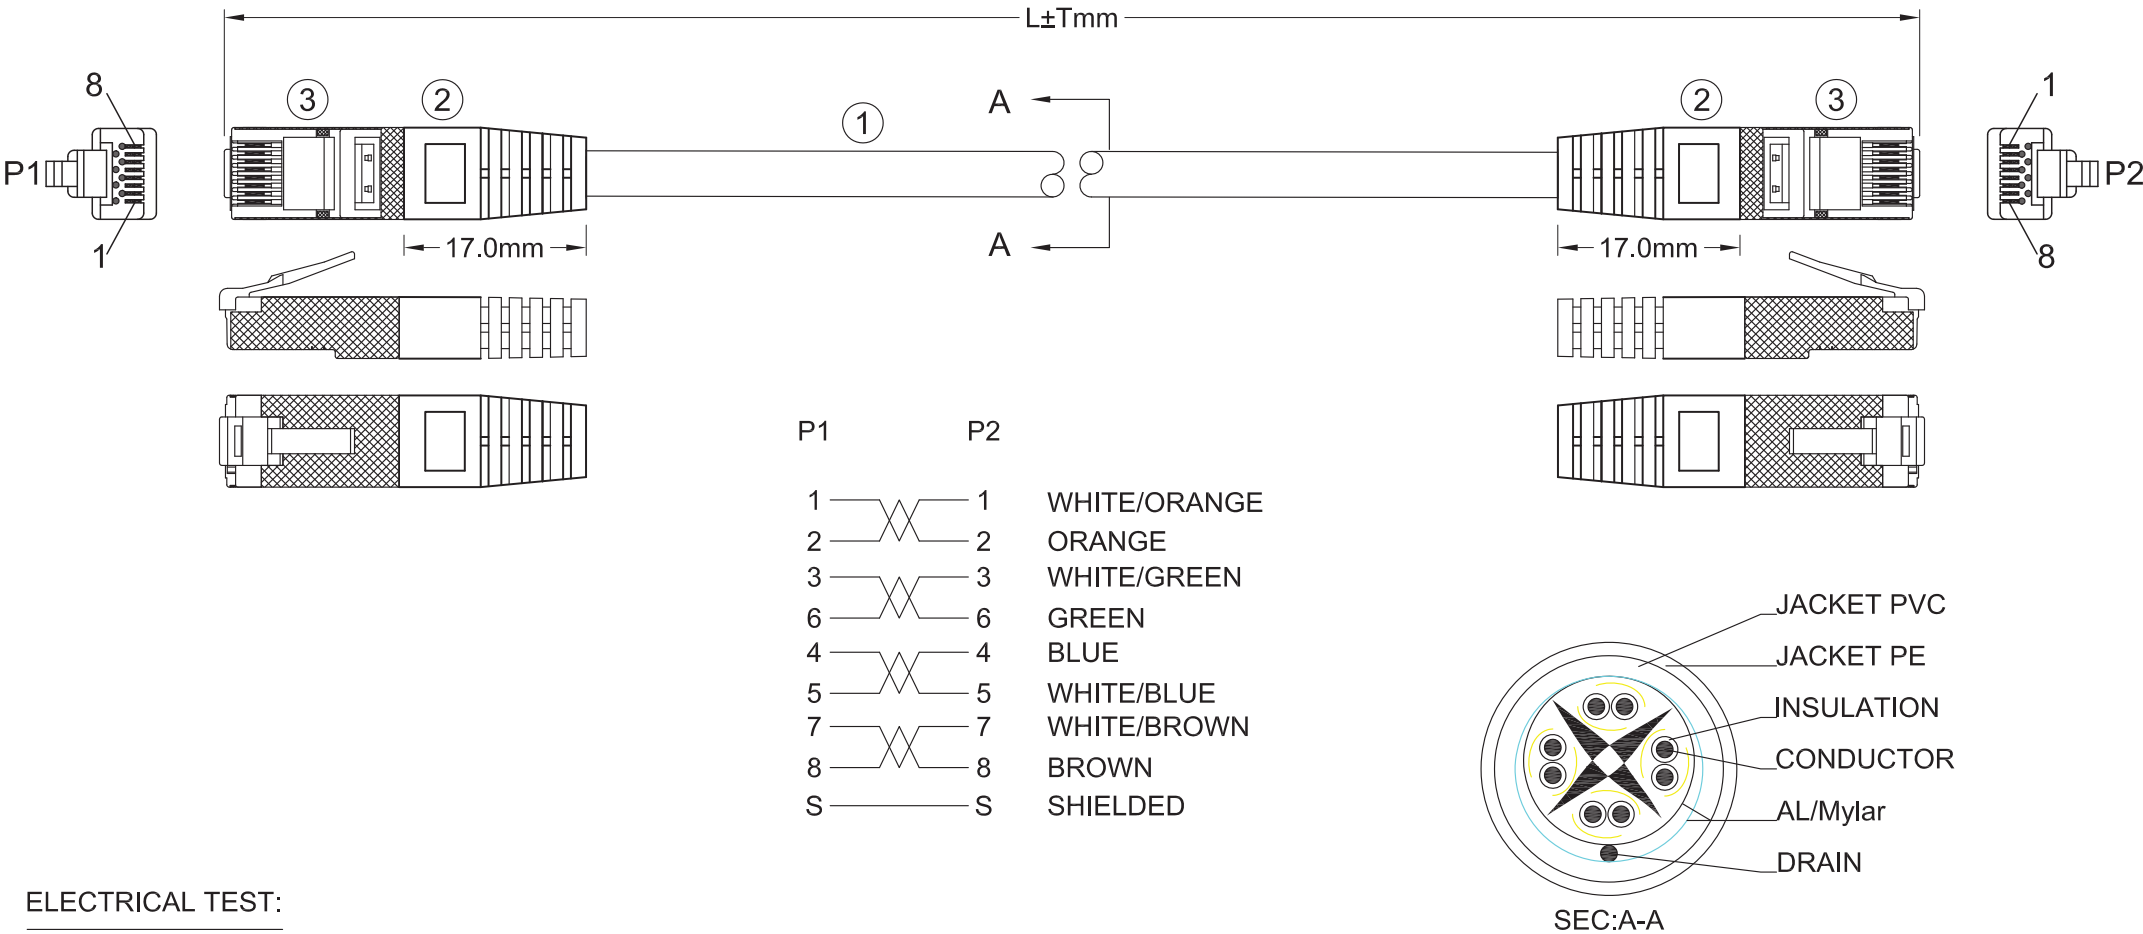

ELECTRICAL TEST:

- 1.100% OPEN&SHORT TEST
- 2.CONTACT RESISTANCE:20 Ohm (MAX)
- 3.INSULATION RESISTANCE:10 MOhm (MIN) DC 300V/10mS
- 4.CHANNEL TEST

3 RJ45 PLUG: 8P8C GOLD PLATED PLUG; SHIELDED NICKEL PLATING.		
2 MOLDED: PVC MOLDED BOOT .		
1	CABLE: CAT6 FTP 4P/26AWG(7/0.16BC)+AL-MYLAR +DRAIN OD=Ø6.0±0.15MM PVC+PE JACKET.	
	MARKING: PATCH CORD CAT.6 FTP STRANDED 26AWG 4PAIRS ANSI/TIA/EIA 568B UV Resistant Waterproof	
NO.	SPECIFICATION	Q'TY
BOM LIST		

ITEM NO:	CAT 6 FTP PATCH CORD			DRAWER DATE	LY 20171009	
TITLE				CHECKED DATE	MTC 20171009	
CUSTOMER				APPROVED DATE		
MATERIAL		SCALE				
REV.	A	UNIT	MM			
DRAWING NO:	71009162					
ACAD FILE	E:\					