



global solutions :
local support™

Vertically Polarized Omni Antennas 2400 to 2485 MHz Operation

The omnidirectional antenna systems offered by Laird Technologies are constructed of UV-stable fiberglass with all stainless steel brackets standard. They come standard with type N female bulkhead connectors with extra heavy duty nuts for optional standoff type mounting. The 7dBi has a 5 deg electrical downtilt standard which is perfect for close-in wireless systems such as apartment complexes. Because of their unique high performance design which eliminates nulls, they can be used in a wide variety of wireless systems.

Features and Benefits:

- 9 and 12 dBi antenna gain
- 12dB has 3 deg electrical downtilt standard
- 9dBi has 0 deg or 7deg electrical downtilt options
- Type N female integrated bulkhead connector
- 12dB has optional 24" pigtail with N male or N female connector
- Rugged, lightweight and waterproof

Applications

- 2.4 GHz ISM band applications
- Base station antennas
- 802.11b and 802.11g wireless systems
- Point to multi-point systems
- Wireless broadband systems
- WiFi access points

For sales information:

Telephone 801-572-3024


E-Mail sales@pacwireless.com

or visit: www.pacwireless.com

Specifications


Parameter	Min	Typ	Max	Units
Frequency Range	2400		2485	MHz
Input Return Loss (S11)		-14		dB
VSWR		1.5:1		
Impedance		50		OHM
Input Power			100	W
Pole Diameter (OD)	1 (25)		2 (50)	In (mm)
Operating Temperature	-40		+70	Deg C
2400-2485MHz	OD24-9		OD24-12	
Gain	9dBi		12dBi	
Vertical Beam Width	14deg		7 deg	
Electrical Downtilt	0 deg or 7 deg		3 deg	
Rated Wind Velocity	125mph (56 M/sec)		125mph (56 M/sec)	
Weight	1.1 Lbs (0.5Kg)		1.4 Lbs (0.6Kg)	
Dimension (L +/-1.0") Diameter Approx. 0.6" (15mm)	27" (69cm)		48" (122cm)	

Wind Loading	
100MPH	8.75 Lbs
125MPH	13.7 Lbs

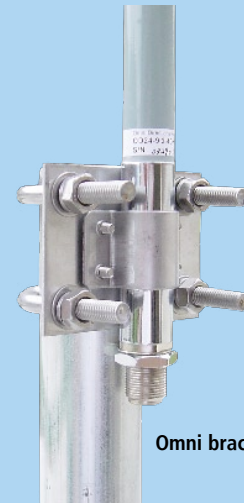


Omni bracket close up


Antenna Patterns

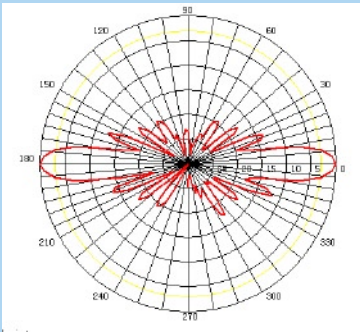

9dB Vertical Antenna Pattern
0 Deg Elec Downtilt - E Plane

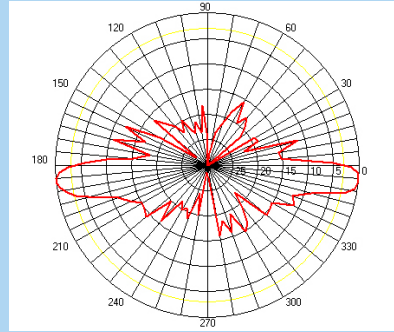

9dB Vertical Antenna Pattern
7 Deg Elec Downtilt - E Plane

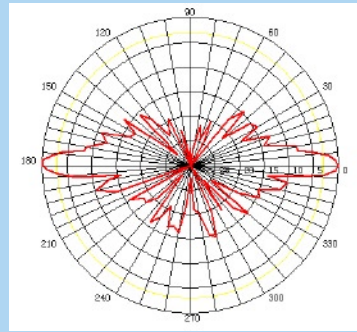

12dB Vertical Antenna Pattern
3 Deg Elec Downtilt - E Plane

System Ordering:

OD24- 9	2.4GHz 9dBi omni antenna
OD24-9D7	2.4GHz 9dBi omni antenna with 5 deg electrical downtilt
OD24- 12	2.4GHz 12dBi omni antenna with 3 deg electrical downtilt
OD24-12P	2.4GHz 12dBi omni antenna with 5 deg electrical downtilt - N male pigtail
OD24-12PF	2.4GHz 12dBi omni antenna with 5 deg electrical downtilt - N female pigtail

Notes:

- All shipments F.O.B. Schaumburg, IL 60173
- All antennas carry a 2 Year Warranty

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies domestic terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request.

Specifications subject to change without notice.



global solutions :
local support™