



PoE Smart Chime


UACC-Chime-PoE

Datasheet

In The Box

Marketing Images

Installation Guide

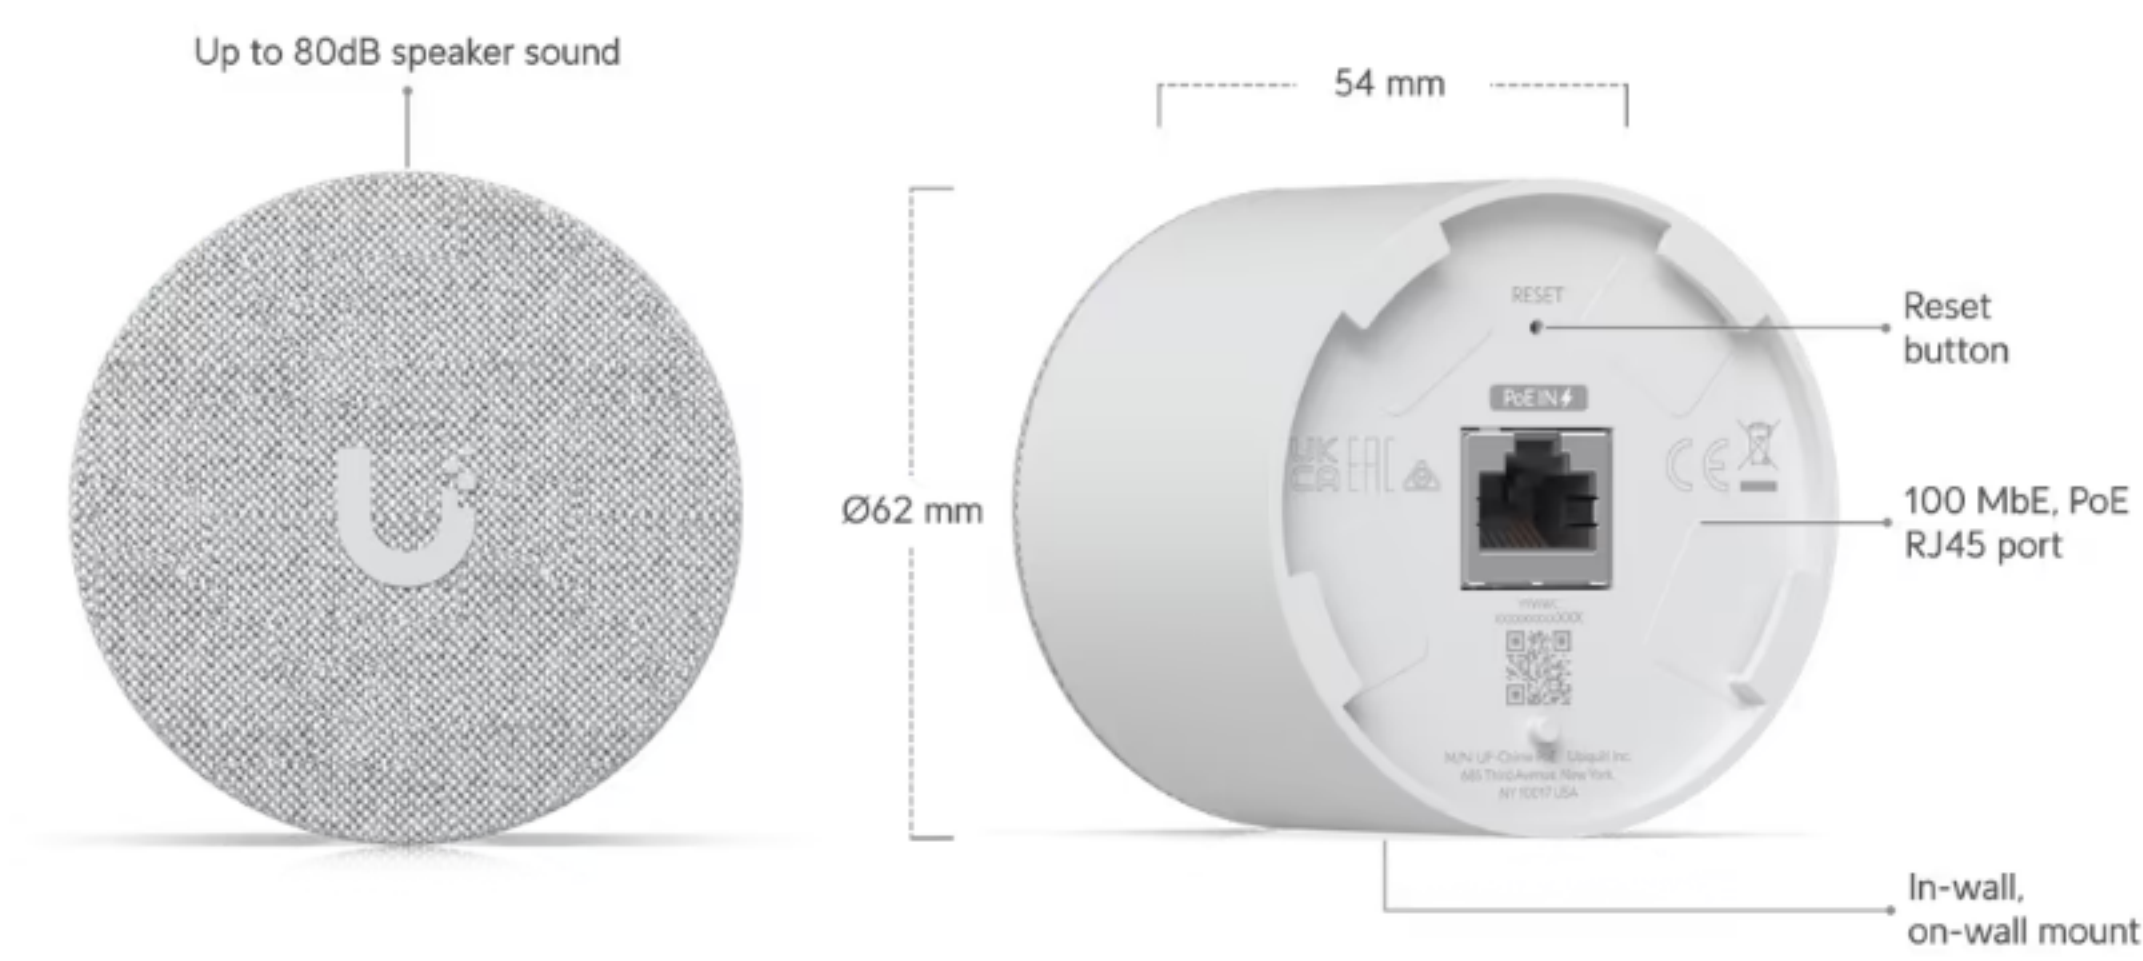

Mechanical

Dimensions

Device: Ø62 x 54 mm (Ø2.5 x 2.1")
In-wall mount: Ø89 x 63.1 mm (Ø3.5 x 2.5")
On-wall Mount: Ø62 x 20.2 mm (Ø2.5 x 0.8")

Weight

Device: 158 g (5.6 oz)
In-wall mount: 91 g (3.2 oz)
On-wall mount: 28 g (1 oz)

Enclosure material

Polycarbonate, aluminum alloy

Mount material

Polycarbonate, zinc alloy

System

Networking interface

10/100 MbE port

Power method

PoE

Supported voltage range

44—57V DC

Max. power consumption

3W

ESD/EMP protection

Air: ± 8kV, contact: ± 4kV

LED

R/G/B/W

Button

Factory reset

Ambient operating temperature

0 to 40° C (32 to 104° F)

Ambient operating humidity

10 to 90% noncondensing

Certifications

CE, FCC, IC

NDAA Compliant

Yes

Audio

Speaker

Yes

Buzzer

Yes

Software

Web application

UniFi Protect
UniFi Access

Mobile app

UniFi Protect iOS™ and Android™