




Electric Lock

UACC-Lock-Strike-Secure-15mm

- [Datasheet](#)
- [Marketing Images](#)
- [Installation Guide](#)

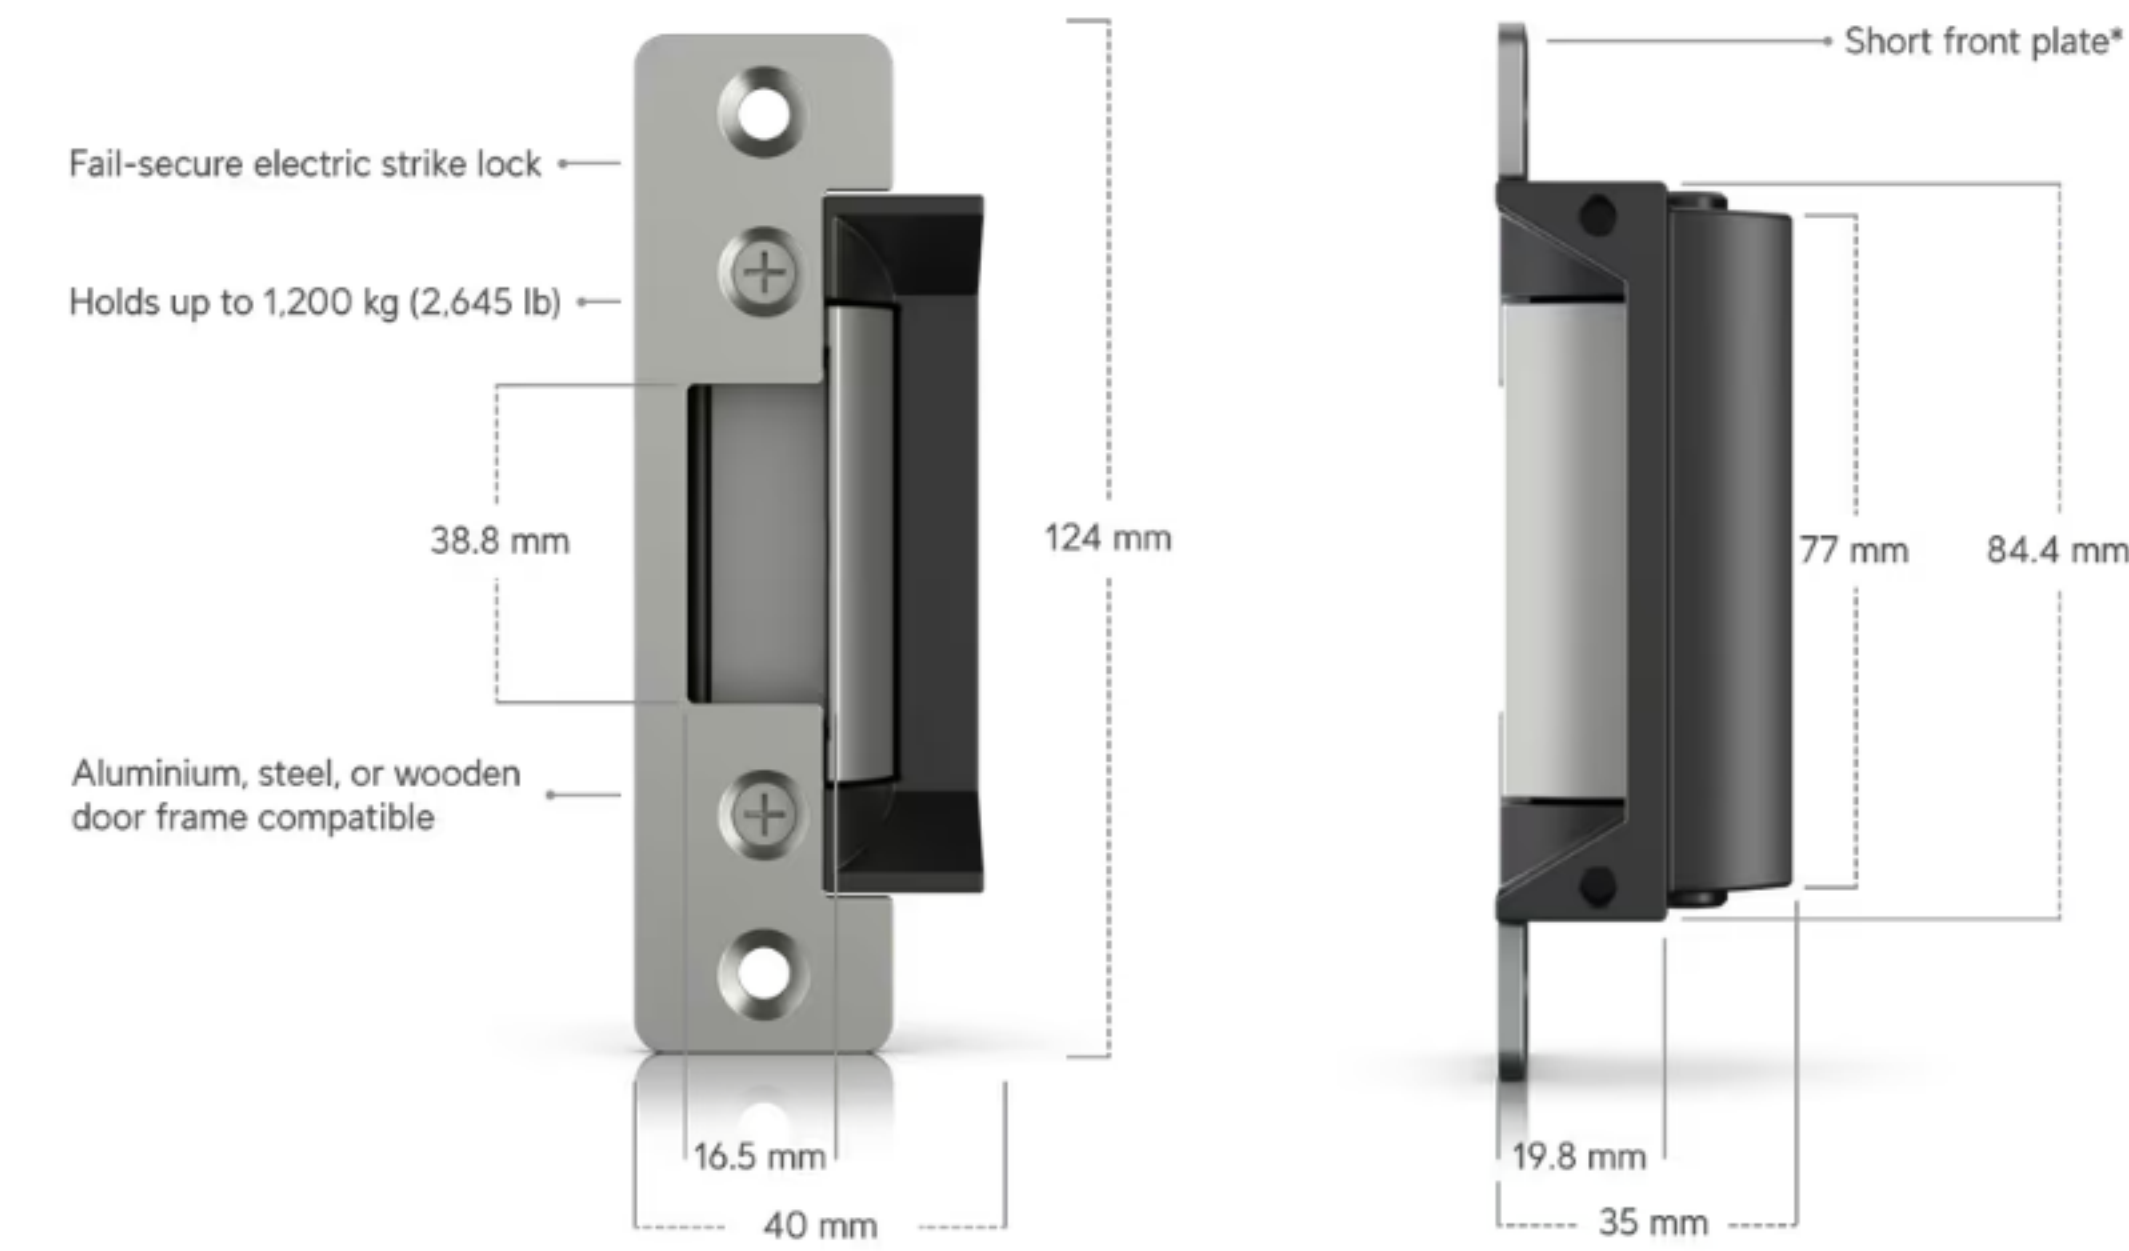

*The short and long front plates are included.

^ Mechanical

Dimensions

Lock body: 80 x 40 x 35 mm (3.2 x 1.6 x 1.4")
 Short front plate: 124 x 32 x 3 mm (4.9 x 1.3 x 0.1")
 Long front plate: 202 x 36 x 3 mm (7.9 x 1.4 x 0.1")

Weight

Lock body: 185 g (6.5 oz)
 Short front plate: 50 g (1.8 oz)
 Long front plate: 130 g (4.6 oz)

Enclosure Material

Lock body: zinc alloy
 Front plate/latches: stainless steel

^ Hardware

Holding Force

Lock: 1,200 kg (2,645 lb)

Type

Fail secure lock
 Single door

Wiring Connection

Connect the two screw terminal separately to powered lock relay on UA-Hub: NO, COM

Current Power

400mA ±10%

Supported Voltage Range

12V DC

Compatibility

Wooden, steel, aluminum door

Screw Terminal

+ and -

Ambient Operating Temperature

-10 to 45° C (14 to 113° F)

Ambient Operating Humidity

5 to 90% noncondensing

NDAA Compliant

✓

Certifications

FCC, IC, CE