






# 12U Rack Cabinet

UACC-Rack-12U-Wall-SW-G

Fully assembled wall-mount rack with built-in fans and removable panels, engineered for easy equipment access and space-efficient small-scale deployments.

## Overview

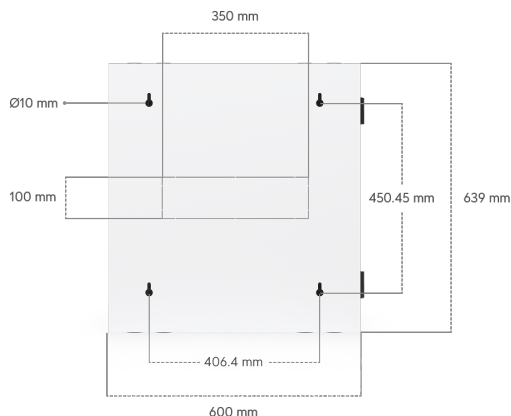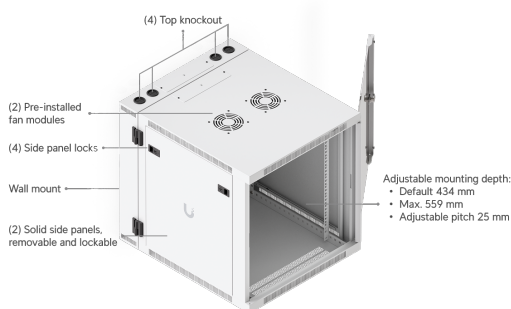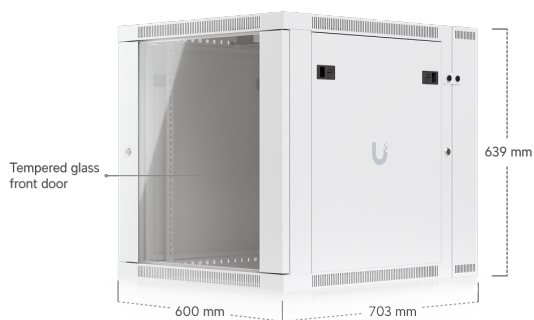

<b>Dimensions</b>	Packaging: 725 x 840 x 735 mm (28.5 x 33.1 x 28.9") Rack: 600 x 703 x 639 mm (23.6 x 27.7 x 25.2")
<b>Weight</b>	Packaging: 35.3 kg (77.8 lb) Rack: 29.4 kg (64.8 lb)
<b>Enclosure Material</b>	SPCC steel Door/side panels: 1.2 mm (0.05") Main body: 1.2 mm (0.05") Posts: 2 mm (0.08")
<b>Color</b>	White
<b>Treatment</b>	Powder coating
<b>Rack Features</b>	
<b>U Height</b>	12U
<b>Rack Type</b>	4 post, enclosed cabinet
<b>Mounting Hole Type</b>	Square
<b>Adjustable Mounting Depth</b>	Default 434 mm (17.1") Max. 559 mm (22") Adjustable pitch 25 mm (1")
<b>Max. Weight Capacity</b>	80 kg (176 lb)
<b>Front Door</b>	Tempered glass Default left-hand outswing, reversible
<b>Rear Door</b>	Solid Swing-out
<b>Side Panels</b>	(2) Solid, removable and lockable
<b>Mounting</b>	Wall mount
<b>Fan Module</b>	✓
<b>Acoustic Noise</b>	≤ 50 dB (A) sound pressure level
<b>Grounding Lugs</b>	✓
<b>Cable Entry Opening</b>	(1) Rear wall: 350 x 100 mm (13.8 x 3.9") (2) Top: 235 x 62 mm (9.3 x 2.4") (4) Top knockout: 35 mm (1.4") (1) Bottom: 235 x 62 mm (9.3 x 2.4") (4) Bottom knockout: 35 mm (1.4")
<b>Security</b>	(1) Front door lock (1) Swing out door lock (4) Side panel locks (2) Keys
<b>Standard</b>	CE; EIA/ECA-310-E; RoHS
<b>NDAA Compliant</b>	✓